Product Specifications

Web Thumbnail Title - MW	Light Cuisine
Product Number for Web -	Product Number 70019

Product Specifications

SURFACE

Material: High quality non-marking rubber

Overall Tile Thickness: 0.50"

Performance: 3 years under normal use

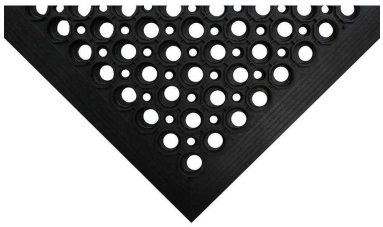

Testing Details

Chemical Resistance - ASTM	NO OR SLIGHT CHANGE / PASS
Dimensional Stability -	MAX. ± 0.020 IN/LIN. FT. / PASS
Flexibility - ASTM F137	20 MM MANDREL / PASS
Light Stability - ASTM F1515	MAX. AVG. DELTA E < 8.0 /PASS
Heat Stability - ASTM F1514	MAX. AVG. DELTA E < 8.0 / PASS
Noise Impact - ASTM E989	IIC: 70
Optical Density - ASTM E662	≤ 450 / PASS
Polish Coated Floors SCOF -	≥ 0.6 DRY: NEOLITE or LEATHER / PASS
Radiant Flux - ASTM E648	≥ 0.45 W/CM² CLASS 1 / PASS
Resilient Floor Plank - ASTM	MAX. ± 0.010 IN / PASS
Sound Transmission ASTM	DELTA IIC: 37
Sound Transmissions -	20 IN SLAB/NO CEILING ASSEMBLY
Solid Vinyl Floor Tile - ASTM	PASS
Suggested Service	-20 to +70 deg. C.
Shore A - Hardness	55-60
Tensile ASTM D412, DIE C	5 Mpa
Thickness - ASTM F386	MAX. ± 0.005 IN AS SPECIFIED / PASS
Made in USA	false
Adhesive Back/Disposable	false
Anti-Microbial	false
Chemical Resistant	false
Drainage/Holes	true
Eco-Friendly	false
Grease/Oil Proof	false
Grease/Oil Resistant	false
NFSI Certified	false
Wet Area Safe	true