SIR-100-HP

Grade: High Purity

Nitrate selective, strong base anion, styrene/DVB macroporous, high purity, chloride form

ResinTech SIR-100-HP is a chloride form nitrate selective strong base anion resin. It has been Gold Seal Certified by the WQA for use in potable water applications. Its unique functionality increases the selectivity for nitrate and decreases selectivity for sulfate, resulting in higher operating capacity and lower leakage than type 1 or type 2 anion resins. SIR-100-HP is intended for the removal of nitrate and/or perchlorate from otherwise potable water and has been screened for low taste and odor.

FEATURES & BENEFITS

- Highest Operating Capacity
- Efficient Brine Regeneration
- Low Sulfate Selectivity
- Superior Physical Stability
- Controlled Particle Size

APPLICATIONS

- Cartridge Applications
- Nitrate Removal
- Perchlorate Removal
- DBP
- Potable Water

PHYSICAL PROPERTIES

Polymer Matrix	Styrene/DVB
Polymer Type	Macroporous
Ionic Form (as shipped)	Chloride (Cl^-)
Functional Group	Triethylamine
Physical Form	Spherical Beads
Uniformity Coefficient	1.60
Particle Size	16-50 US mesh (297-1190µm)
< 50 mesh (300 µm) %	< 1%
Minimum Sphericity (%)	95
Reversible Swelling	$Cl \rightarrow No_3$ -5 to -10%
Capacity (meq/mL)	0.90
Moisture Retention (%)	46 to 56
Shipping Weight	40 - 42 lbs/cu.ft. (641 - 673 g/L)
Color	White to Tan
Regenerable	Regenerable

SUGGESTED OPERATING CONDITIONS

Maximum Temperature	250°F (121°C)
Minimum Bed Depth	24 in. (61.0 cm)
Operating pH Range	4.0 to 10.0
Flow Rate	
Working Service	1-4 gpm/cu.ft. (8-32 BV/h)

RESINTECH® INC.
INNOVATIONS IN ION EXCHANGE

CORPORATE HEADQUARTERS 1801 Federal Street Camden, NJ 08105 USA PHONE 856.768.9600 EMAIL info@resintech.com WEB resintech.com

REGENERATION DETAILS

Salt Cycle (NaCl)	10 to 15%	Displacement Flow Rate	Same as dilution water
Regenerant Level	3-10 lbs/cu.ft. (48.1-160.2 g/L)	Displacement Volume	10-15 gals/cu.ft. (1-2 BV)
Regenerant Flow Rate	0.25-1.0 gpm/cu.ft. (2-8 BV/h)	Rinse Flow Rate	Same as service flow
Regenerant Contact Time	> 30 minutes	Rinse Volume	35-60 gals/cu.ft. (5-8 BV)

BACKWASH EXPANSION

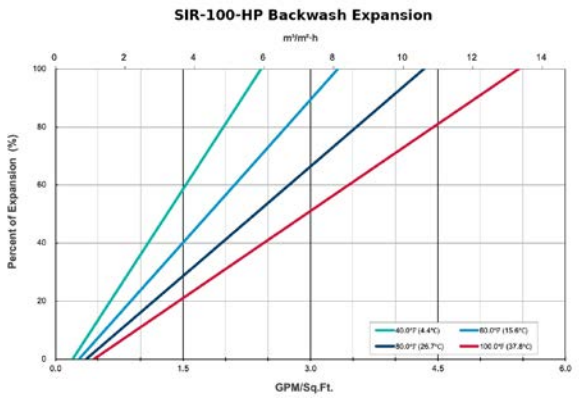

The graph above shows the expansion characteristics of ResinTech SIR-100-HP as a function of flow rate at various temperatures.

CAPACITY

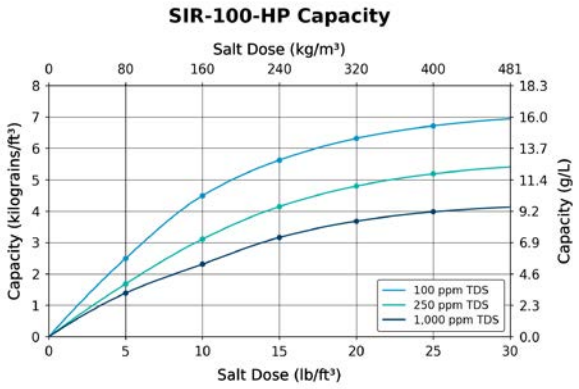

Capacity and leakage data are based on the following: 2:1 Ca:Mg ratio, 500 ppm TDS as CaCO3, 0.2% hardness in the salt and 10% brine concentration applied co-currently through the resin over 30 minutes. No engineering downgrade has been applied.

NITRATE REMOVAL

ResinTech **SIR-100-HP** is used in the chloride form to remove nitrates from potable water. It has a unique amine functional group that eliminates the possibility of nitrate dumping. **SIR-100-HP** has reduced affinity for sulfate which provides high operating capacity and efficient regeneration. When treating waters with high hardness the brine dilution and displacement waters should be softened and a low hardness salt used to prevent scaling.

CERTIFICATIONS

Meets NSF/ANSI/CAN 61

Meets NSF/ANSI/CAN 372

PACKAGING

Standard

1 cu.ft. Bag | 7 cu.ft. Drum
25L Bag | 200 L Drum

Metric

5 cu.ft. Drum | 42 cu.ft. Supersack
140L Drum | 1000 L Supersack

Shipping Weight

40 - 42 lbs/cu.ft. (641 - 673 g/L)

RESINTECH® INC.
INNOVATIONS IN ION EXCHANGE

CORPORATE HEADQUARTERS 1801 Federal Street Camden, NJ 08105 USA PHONE 856.768.9600 EMAIL info@resintech.com WEB resintech.com

MATERIAL SAFETY DATA SHEETS (MSDS)

Material Safety Data Sheets (MSDS) are available for all products on the ResinTech website. They contain important health and safety information that may be needed to protect your employees and customers from any known health and safety hazards associated with our products. We recommend that you secure and study the pertinent MSDS for our products and any other products being used.

These suggestions and data are based on information we believe to be reliable. They are offered in good faith. However we do not make any guarantee or warranty. We caution against using these products in an unsafe manner or in violation of any patents; further we assume no liability for the consequences of any such actions.

Safety Data Sheets (SDS) are available at resintech.com

RESINTECH® INC.
INNOVATIONS IN ION EXCHANGE

CORPORATE HEADQUARTERS 1801 Federal Street Camden, NJ 08105 USA PHONE 856.768.9600 EMAIL info@resintech.com WEB resintech.com