CG8-C

Grade: Standard

Strong acid cation resin, styrene/DVB 8% crosslinked gel, coarse mesh, sodium form

ResinTech CG8-C is a coarse mesh, strong acid cation resin in the sodium form. It is amber in color and made from a 8% crosslinked gel. It has the same physical characteristics, regeneration efficiency, and oxidative stability as other resins in the CG8 family. CG8-C is intended for use in industrial applications where minimizing pressure loss is essential even when suspended solids may be present.

FEATURES & BENEFITS

- Uniform coarse particle size
- Industrial softening and demineralizing applications
- Low color throw
- Superior physical stability
- Complies with US FDA regulations

APPLICATIONS

- High Flow Rate
- Softening

PHYSICAL PROPERTIES

Polymer Matrix	Styrene/DVB
Polymer Type	Gel
Ionic Form (as shipped)	Sodium (Na^+)
Functional Group	Sulfonic Acid
Physical Form	Spherical Beads
Uniformity Coefficient	1.60
Particle Size	16-30 US mesh (600-1190µm)
< 50 mesh (300 µm) %	< 1%
Minimum Sphericity (%)	93
Reversible Swelling	5 to 9% (Na → H)
Capacity (meq/mL)	2.00
Moisture Retention (%)	42 to 49
Shipping Weight	51 - 53 lbs/cu.ft. (817 - 849 g/L)
Color	Amber
Regenerable	Regenerable

SUGGESTED OPERATING CONDITIONS

Maximum Temperature	280°F (138°C)
Minimum Bed Depth	24 in. (61.0 cm)
Maximum Pressure Loss	25 psi (172 kPa)
Backwash Expansion (%)	25 to 50
Operating pH Range	0 to 14
Flow Rate	
Working Service	1-10 gpm/cu.ft. (8-80 BV/h)

Conforms to §21CFR173.25 of the USFDA Food Additives Regulations

RESINTECH® INC.
INNOVATIONS IN ION EXCHANGE

CORPORATE HEADQUARTERS 1801 Federal Street Camden, NJ 08105 USA PHONE 856.768.9600 EMAIL info@resintech.com WEB resintech.com

REGENERATION DETAILS

Salt Cycle (NaCl)	10 to 15%	Displacement Flow Rate	Same as dilution water
Regenerant Level	4-15 lbs/cu.ft. (64.1-240.3 g/L)	Displacement Volume	10-15 gals/cu.ft. (1-2 BV)
Regenerant Flow Rate	0.5-1.5 gpm/cu.ft. (4-12 BV/h)	Rinse Flow Rate	Same as service flow
Regenerant Contact Time	> 20 minutes	Rinse Volume	35-60 gals/cu.ft. (5-8 BV)

PRESSURE LOSS

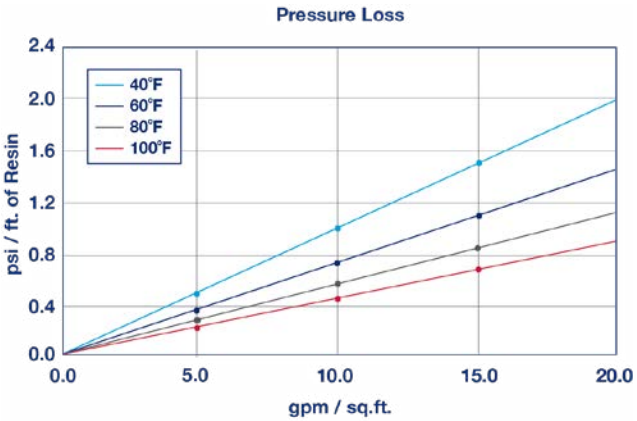

The graph above shows the expected pressure loss of ResinTech CG8-C per foot of bed depth as a function of flow rate at various temperatures.

BACKWASH EXPANSION

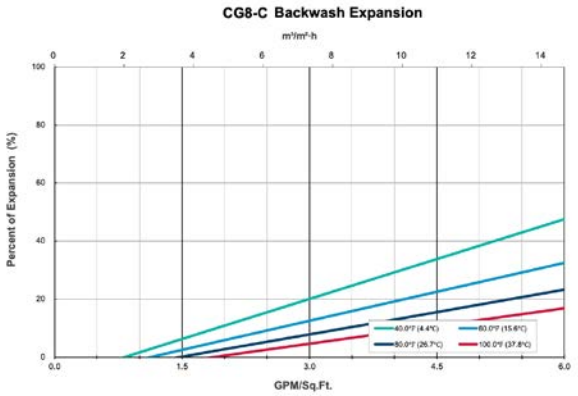

The graph above shows the expansion characteristics of ResinTech CG8-C as a function of flow rate at various temperatures.

CAPACITY

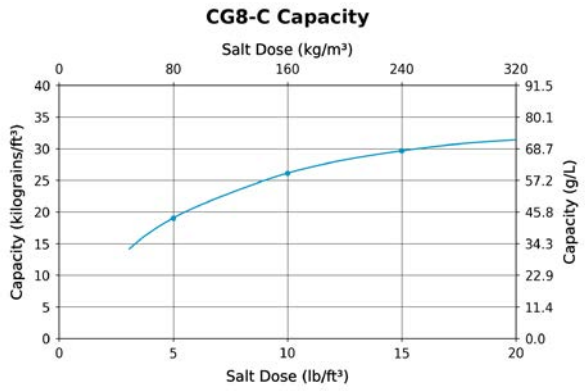

Capacity and leakage data are based on the following: 2:1 Ca:Mg ratio, 500 ppm TDS as CaCO3, 0.2% hardness in the salt and 10% brine concentration applied co-currently through the resin over 30 minutes. No engineering downgrade has been applied.

HIGH FLOW RATE USE

ResinTech **CG8-C** is made with a large bead size which increases the void spaces between the beads and reduces the surface area, thus reducing the resistance to water flow through the resin bed. Because the resin bed has lower pressure loss the resin can operate at high flow rates. High flow rates are useful in polishing applications where a large resin volume is not needed to provide a long throughput between regenerations. It should be understood that the rate of ion exchange is somewhat slower due to the large bead size.

RESINTECH® INC.
INNOVATIONS IN ION EXCHANGE

CORPORATE HEADQUARTERS 1801 Federal Street Camden, NJ 08105 USA PHONE 856.768.9600 EMAIL info@resintech.com WEB resintech.com

SOFTENING

ResinTech **CG8-C**is an 8% crosslinked cation resin optimized for industrial softening applications. **CG8-C** is suitable for hot water applications and for waters that contain modest levels of chlorine.

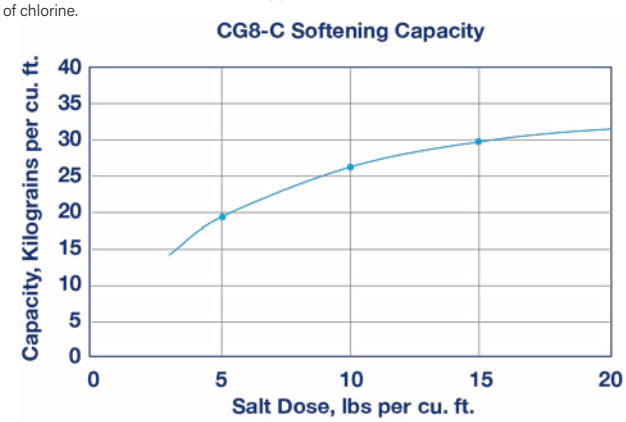

Capacity and leakage data are based on the following: 2:1 Ca:Mg ratio, 500 ppm TDS as CaCO3, 0.2% hardness in the salt and 10% brine concentration applied cocurrently through the resin over 30 minutes. No engineering downgrade has been applied.

CERTIFICATIONS

Meets NSF/ANSI/CAN 44

Meets NSF/ANSI/CAN 61

Meets NSF/ANSI/CAN 372

REACH Registered

PACKAGING

Standard

1 cu.ft. Bag | 42 cu.ft. Supersack
1000L Supersack | 25L Bag

Metric

5 cu.ft. Drum | 7 cu.ft. Drum
140L Drum | 200L Drum

Shipping Weight

51 - 53 lbs/cu.ft. (817 - 849 g/L)

RESINTECH® INC.
INNOVATIONS IN ION EXCHANGE

CORPORATE HEADQUARTERS 1801 Federal Street Camden, NJ 08105 USA PHONE 856.768.9600 EMAIL info@resintech.com WEB resintech.com

MATERIAL SAFETY DATA SHEETS (MSDS)

Material Safety Data Sheets (MSDS) are available for all products on the ResinTech website. They contain important health and safety information that may be needed to protect your employees and customers from any known health and safety hazards associated with our products. We recommend that you secure and study the pertinent MSDS for our products and any other products being used.

These suggestions and data are based on information we believe to be reliable. They are offered in good faith. However we do not make any guarantee or warranty. We caution against using these products in an unsafe manner or in violation of any patents; further we assume no liability for the consequences of any such actions.

Safety Data Sheets (SDS) are available at resintech.com

RESINTECH® INC.
INNOVATIONS IN ION EXCHANGE

CORPORATE HEADQUARTERS 1801 Federal Street Camden, NJ 08105 USA PHONE 856.768.9600 EMAIL info@resintech.com WEB resintech.com