# SBACR-HP-S

Grade: Sterile

## Strong base anion

ResinTech SBACR-HP-S is an acrylic gel strong base anion resin in chloride form. The polymer has an open aliphatic structure which allows organic anions to exchange in and out of the resin more easily than anion resins based on a polystyrene polymer structure. SBACR-HP-S is intended for use for the removal of NOM (naturally occurring organic matter).

### FEATURES & BENEFITS

- High capacity for organics
- Excellent regeneration efficiency
- Superior physical stability
- Controlled particle size
- Complies with US FDA regulations

### PHYSICAL PROPERTIES

| | |
|---|---|
| Polymer Matrix | Acrylic/DVB |
| Polymer Type | Gel |
| Ionic Form (as shipped) | Chloride ($Cl^-$) |
| Functional Group | Quaternary Amine |
| Physical Form | Spherical Beads |
| Uniformity Coefficient | 1.60 |
| Particle Size | 16-50 US mesh (297-1190µm) |
| < 50 mesh (300 µm) % | < 1% |
| Minimum Sphericity (%) | 90 |
| Reversible Swelling | 10 to 15% (Cl → OH) |
| Capacity (meq/mL) | 1.25 |
| Moisture Retention (%) | 55 to 63 |

### SUGGESTED OPERATING CONDITIONS

| | |
|---|---|
| Maximum Temperature | 150°F (66°C) |
| Maximum Pressure Loss | 20 psi (138 kPa) |
| Backwash Expansion (%) | 25 - 50 |
| Operating pH Range | 5.8 to 7.5 |
| Flow Rate | |
| Working Service | 1-4 gpm/cu.ft. (8-32 BV/h) |

### REGENERATION DETAILS

| | |
|---|---|
| Salt Cycle (NaCl) | 2% - 10% |
| Displacement Flow Rate | Same as dilution water |
| Displacement Volume | 10-15 gals/cu.ft. (1-2 BV) |

Conforms to §21CFR173.25 of the USFDA Food Additives Regulations



RESINTECH INC.
INNOVATIONS IN ION EXCHANGE

CORPORATE HEADQUARTERS 1801 Federal Street Camden, NJ 08105 USA PHONE 856.768.9600 EMAIL info@resintech.com WEB resintech.com

## ORGANIC TRAP

ResinTech **SBACR-HP-S** has excellent capacity for tannins and other naturally occurring organic matter (NOM) which cause most of the color in potable waters. **SBACR-HP-S** removes these substances and is easily regenerated with sodium chloride, in the same fashion as a water softener. Organic trap resins should be regenerated frequently to prevent the NOM from building up inside the resin beads and eventually causing fouling. For industrial applications it is sometimes useful to add a little caustic to the brine in order to increase capacity and reduce leakage. Use of chloride form anion resin reduces the pH of the product water during the early part of the exhaustion cycle.

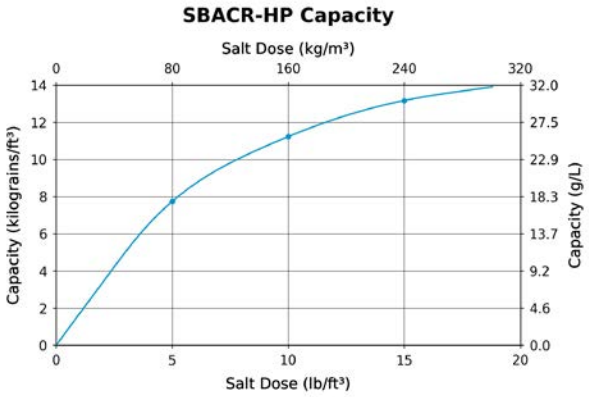


Capacity based on 2 gpm/cu.ft. flow rate, pH near neutral, and 36 inch minimum bed depth. Capacity is for TOC plus sulfate. No engineering downgrade has been applied.

## CERTIFICATIONS

Meets NSF/ANSI/CAN 61

Meets NSF/ANSI/CAN 372

## PACKAGING

### *Standard*

42 cu.ft. Supersack | 7 cu.ft. Drum
200L Drum | 1000L Supersack

### *Metric*

1 cu.ft. Bag | 5 cu.ft. Drum
25L Bag | 140L Drum



RESINTECH® INC.
INNOVATIONS IN ION EXCHANGE

CORPORATE HEADQUARTERS 1801 Federal Street Camden, NJ 08105 USA PHONE 856.768.9600 EMAIL info@resintech.com WEB resintech.com

## MATERIAL SAFETY DATA SHEETS (MSDS)

Material Safety Data Sheets (MSDS) are available for all products on the ResinTech website. They contain important health and safety information that may be needed to protect your employees and customers from any known health and safety hazards associated with our products. We recommend that you secure and study the pertinent MSDS for our products and any other products being used.

These suggestions and data are based on information we believe to be reliable. They are offered in good faith. However we do not make any guarantee or warranty. We caution against using these products in an unsafe manner or in violation of any patents; further we assume no liability for the consequences of any such actions.

Safety Data Sheets (SDS) are available at resintech.com



RESIN TECH® INC.
INNOVATIONS IN ION EXCHANGE

CORPORATE HEADQUARTERS 1801 Federal Street Camden, NJ 08105 USA PHONE 856.768.9600 EMAIL info@resintech.com WEB resintech.com