CG8-F-HP

Strong acid cation resin, styrene/DVB 8% crosslinked gel, high-purity, fine mesh, sodium form

ResinTech CG8-F-HP is a high purity fine mesh strong acid cation resin in the sodium form. It is amber in color and made with an 8% crosslinked gel. The HP (high purity) designation means it is Gold Seal Certified by the WQA for use in potable water applications. CG8-F-HP is intended for potable water softening applications that have moderate levels of iron in the feedwater and where resin bed depth is less than ideal.

FEATURES & BENEFITS

- Uniform fine particle size
- Residential softening
- Low color throw
- Superior physical stability
- Complies with US FDA regulations

APPLICATIONS

- Iron Reduction
- Softening - Municipal
- Softening - Residential

Meets NSF/ANSI/CAN 61
Meets NSF/ANSI/CAN 372
REACH Registered
Kosher Certified
Halal Certified

Conforms to §21CFR173.25 of the USFDA Food Additives Regulations

RESINTECH® INC.
INNOVATIONS IN ION EXCHANGE

CORPORATE HEADQUARTERS 1801 Federal Street Camden, NJ 08105 USA PHONE 856.768.9600 EMAIL info@resintech.com WEB resintech.com

CG8-F-HP

Polymer Matrix	Styrene/DVB
Polymer Type	Gel
Ionic Form (as shipped)	Sodium (Na^+)
Functional Group	Sulfonic Acid
Physical Form	Spherical Beads
Particle Size US Mesh (µm)	30 (595) to 50 (297)
< 50 mesh (300 µm) %	< 30%
Minimum Sphericity (%)	93

Reversible Swelling	5 to 9% (Na → H)
Uniformity	Gaussian
Uniformity Coefficient	1.40
Capacity (meq/mL)	2.00
Moisture Retention (%)	42 to 49
Shipping Weight	49 - 51 lbs/cu.ft. (785 - 817 g/L)
Color	Amber
Regenerable	Regenerable

BACKWASH EXPANSION

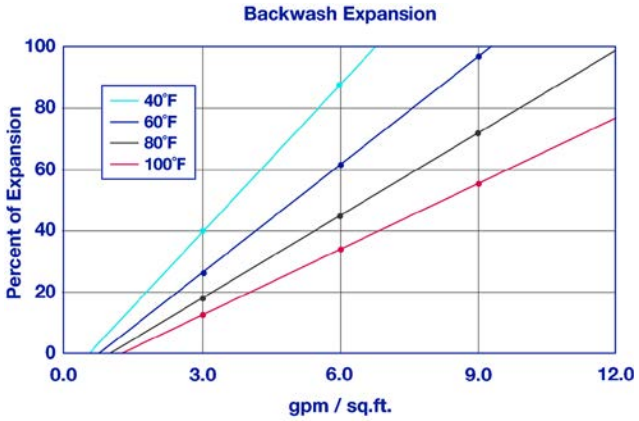

The graph above shows the expansion characteristics of ResinTech CG8-F-HP as a function of flow rate at various temperatures.

SUGGESTED OPERATING CONDITIONS

Maximum Temperature	280°F (138°C)
Minimum Bed Depth	24 in. (61.0 cm)
Maximum Pressure Loss	25 psi (172 kPa)
Backwash Expansion (%)	25 to 50

Operating pH Range	0 to 14
Flow Rate	
Working Service	1-10 gpm/cu.ft. (8-80 BV/h)

RESINTECH® INC.
INNOVATIONS IN ION EXCHANGE

CORPORATE HEADQUARTERS 1801 Federal Street Camden, NJ 08105 USA PHONE 856.768.9600 EMAIL info@resintech.com WEB resintech.com

CAPACITY GRAPH 1

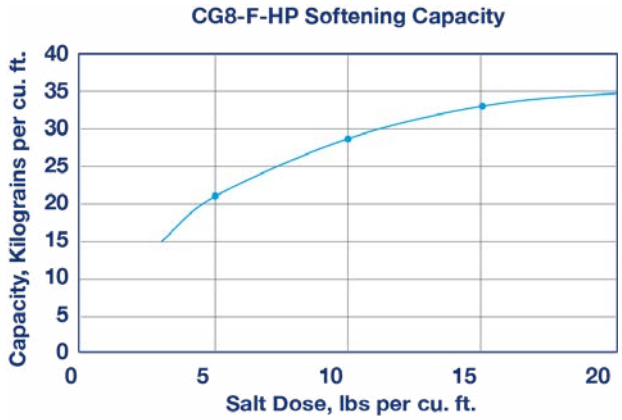

Capacity and leakage data are based on the following: 2:1 Ca:Mg ratio, 500 ppm TDS as CaCO3, 0.2% hardness in the salt and 10% brine concentration applied co-currently through the resin over 30 minutes. No engineering downgrade has been applied.

IRON REMOVAL

ResinTech CG8-F-HP has good capacity for iron removal. Soluble (ferrous) iron is removed by ion exchange, in much the same way as hardness ions are removed. Particulate (ferric) iron is removed by filtration. As a general rule of thumb, to protect against fouling, the iron content in the feedwater should not be more than 1 mg/L Fe per each 17 mg/L of hardness. This ensures an adequate salt dose and frequent regenerations which helps to prevent fouling.

SOFTENING

ResinTech CG8-F-HP is an 8% crosslinked cation resin optimized for residential softening applications. CG8-F-HP has higher total capacity than standard crosslinked resins such as CGS and has higher operating capacity when relatively large brine doses are used during regeneration.

REGENERATION DETAILS

Salt Cycle (NaCl)	10 to 15%	Displacement Flow Rate	Same as dilution water
Regenerant Level	4-15 lbs/cu.ft. (64.1-240.3 g/L)	Displacement Volume	10-15 gals/cu.ft. (1-2 BV)
Regenerant Flow Rate	0.5-1.5 gpm/cu.ft. (4-12 BV/h)	Rinse Flow Rate	Same as service flow
Regenerant Contact Time	> 20 minutes	Rinse Volume	35-60 gals/cu.ft. (5-8 BV)

PACKAGING

Standard

1 cu.ft. Bag | 42 cu.ft. Supersack
5 cu.ft. Drum | 7 cu.ft. Drum

Metric

140L Drum | 200L Drum

RESINTECH® INC.
INNOVATIONS IN ION EXCHANGE

CORPORATE HEADQUARTERS 1801 Federal Street Camden, NJ 08105 USA PHONE 856.768.9600 EMAIL info@resintech.com WEB resintech.com

SAFETY DATA SHEETS (SDS)

Safety Data Sheets (SDS) are available for all products on the ResinTech website. They contain important health and safety information that may be needed to protect your employees and customers from any known health and safety hazards associated with our products. We recommend that you secure and study the pertinent MSDS for our products and any other products being used.

These suggestions and data are based on information we believe to be reliable. They are offered in good faith.
However we do not make any guarantee or warranty. We caution against using these products in an unsafe manner or in violation of any patents; further we assume no liability for the consequences of any such actions.

Safety Data Sheets (SDS) are available at resintech.com

RESINTECH® INC.
INNOVATIONS IN ION EXCHANGE

CORPORATE HEADQUARTERS 1801 Federal Street Camden, NJ 08105 USA PHONE 856.768.9600 EMAIL info@resintech.com WEB resintech.com