COBAGRiP® Stair Nosing

PRODUCT DATASHEET

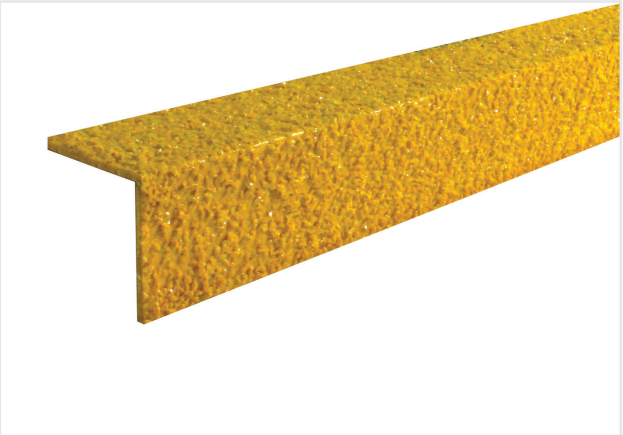

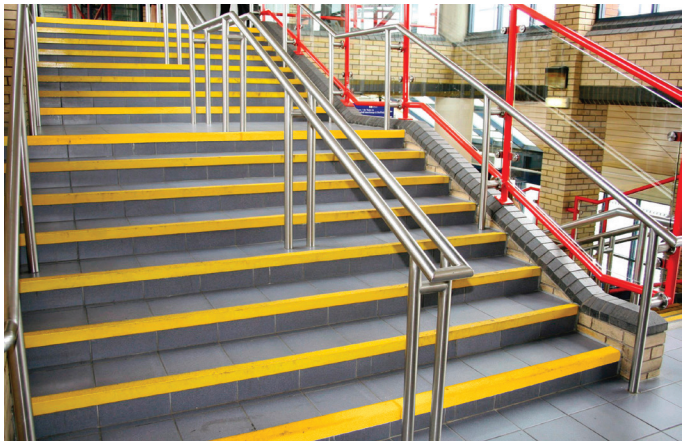

FEATURES AND BENEFITS

- Durable and easy to install on both existing and new-build steps.
- A hard wearing, gritty surface available in bright colours helps protect against slips and trips whilst meeting the Equality Act requirements (DDA).
- Manufactured with chamfered back edge for additional safety.

Technical Specification

Material	GRP
Product Height	5 mm
Min. Operating Temperature	-50°C
Max. Operating Temperature	+90°C
Available length	1m, 1.5m, 2m & 3m
Environmental Resistance	Suitable for indoor and outdoor environments
Typical Applications	External steps
Installation Method	Bond or screw to surface
Cleaning Method	COBAGRiP should be almost maintenance free in most outside environments. Natural elements will have the effect of cleaning COBAGRiP. Brushing and flushing with a mild detergent solution may be desirable now and again to restore appearance.
Fire Tested to	DIN 13501: Bfl – s1 (2018) & EN ISO 11925-2:2020 & EN ISO 9239-1:2010 (both 2021)
COO (Country of Origin)	CN
Slip Tested to	DIN 51130 – R13 & BS 7976-2 – low slip potential

STYLES AND COLOURS

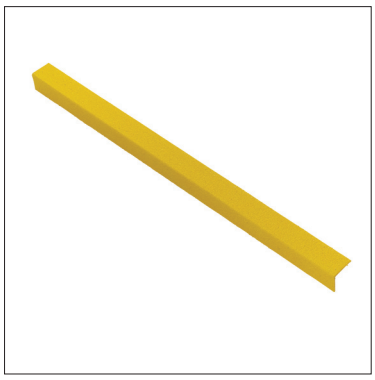

COBAGRiP® Stair Nosing Yellow

COBAGRiP® Stair Nosing Black

COBAGRiP® Stair Nosing Black and Yellow

+44 (0)1788 228 566 contact@cobaflooring.com
Europark Industrial Estate, A5 Watling Street, Rugby, Warwickshire, CV23 0AL, United Kingdom