Hybrid Typhoon Mobile

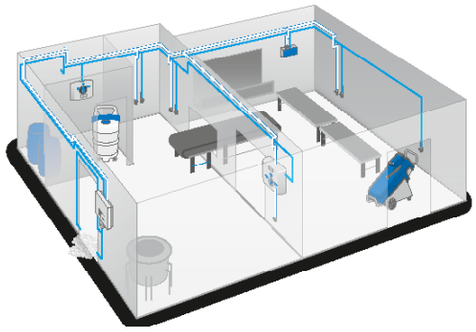

Complete mobile hygiene station for cleaning of open plant surfaces

Ecolab Hybrid Typhoon is equipped with the new DuoBlock which allows 2 detergents, 1 of which could be mixed. The mobile design allows reaching and cleaning every corner of your food premises despite the hose length.

The Hybrid Typhoon has an integrated water pump supplying a water pressure of 20 bars + inlet pressure, max 25 bar.

It has a built-in security kit with dry-run protection and automatic turn-off after 30 min. inactivity.

Applications

- Open plant surfaces

Features

- Corona technology
  Better mix of air, detergent and water - generates approx. 20% more foam.
- DuoFoam Technology
  The new injector block has the capacity for two different compounds at only one outlet, which makes it very easy and safe to change from one product to another.
- MIX, Double Injection Technology
  The unique system is prepared for the injection of an extra booster product into the DuoFoamTechnology block, which takes the cleaning effect into a whole new level.

Benefits

- Flexible
- Safe
- Hygienic
- Saved time
- Saved labour costs
- Saved water costs

ECOLAB®

www.ecolab.nilfiskfood.com

For further information:
Phone: +45 29 69 51 00
E-mail: info@nilfiskfood.com

Hybrid Typhoon

Complete mobile hygiene station for cleaning of open plant surfaces

Technical specifications

Water	Hybrid Typhoon	Hybrid Typhoon 40
Connection type inlet	3/4" quick coupler	3/4" quick coupler
Pump pressure	20 bar	40 bar
Adjustable operational pressure	20 bar + inlet (max 25 bar)	35 bar + inlet (max 40 bar)
Operational flow range	10-50 l/min	10-60 l/min
Min. inlet pressure	2 bar@50 l/min	2 bar@60 l/min
Max. inlet pressure	4 bar	4 bar
Max. water temperature	70°C	70°C
Electricity		
Power consumption	7,7 kW	11,5 kW
Nom. current	3/PE 400Vac +-10% 50/60Hz	3/PE 400Vac +-10% 50/60Hz
Security of electrical wiring	16 A	16 A
Electrical cable; L1, l2, L3, PE	CEE 5 px16A 400V	CEE 5 px16A 400V
Supply voltage	3/PE 380-528VAC - 50/60Hz	
General		
Number of products	2	2
IP class	IP55	IP55
Max. hose lenth (recommended)	25 m	25 m
Sound level ISO 11202	Below 70dB	Below 70dB
Weight	130 kg	120

Standard models

Model	Article no.	EBS no.
Hybrid Typhoon 50Hz	110004506	10036330
Hybrid Typhoon 50Hz, userpack	110004507	10036332
Hybrid Typhoon 50Hz, 40 bar	110004508	10036342
Hybrid Typhoon 50Hz, 40 bar userpack	110004509	10036344
Hybrid Typhoon 60Hz	110004514	
Hybrid Typhoon 60Hz, userpack	110004515	

Need more info?

Visit NILFISKFOOD.COM for more details including video tutorials and more.

Web Video Troubleshooting

ECOLAB®

www.ecolab.nilfiskfood.com

For further information:
Phone: +45 29 69 51 00
E-mail: info@nilfiskfood.com