SBG1-OH-ID

Color-indicating strong base type 1 anion resin, styrene/DVB gel, hydroxide form

ResinTech SBG1-OH-ID is a fine mesh type 1 gel strong base anion resin in the hydroxide form. It offers high capacity and resistance to both thermal and chemical oxidation. SBG1-OH-ID is a color-indicating resin that changes from blue to amber as the resin exhausts.

FEATURES & BENEFITS

- High total capacity for long run lengths
- Color-indicating exhaustion
- Superior physical stability
- Controlled particle size
- Low pressure drop & better kinetics
- Complies with US FDA regulations

APPLICATIONS

- Anion Component in Mixed Beds

REACH Registered

RESINTECH® INC.
INNOVATIONS IN ION EXCHANGE

CORPORATE HEADQUARTERS 1801 Federal Street Camden, NJ 08105 USA PHONE 856.768.9600 EMAIL info@resintech.com WEB resintech.com

SBG1-OH-ID

Polymer Matrix	Styrene/DVB
Polymer Type	Gel
Ionic Form (as shipped)	Hydroxide (OH^-)
Functional Group	Trimethylamine
Physical Form	Spherical Beads
Particle Size US Mesh (µm)	16 (1190) to 50 (297)
< 50 mesh (300 µm) %	< 1

Minimum Sphericity (%)	93
Reversible Swelling	18 to 25% (Cl → OH)
Uniformity	Gaussian
Uniformity Coefficient	1.60
Capacity (meq/mL)	1.00
Moisture Retention (%)	53 to 60
Shipping Weight	40 - 42 lbs/cu.ft. (641 - 673 g/L)
Color	Blue

PRESSURE LOSS

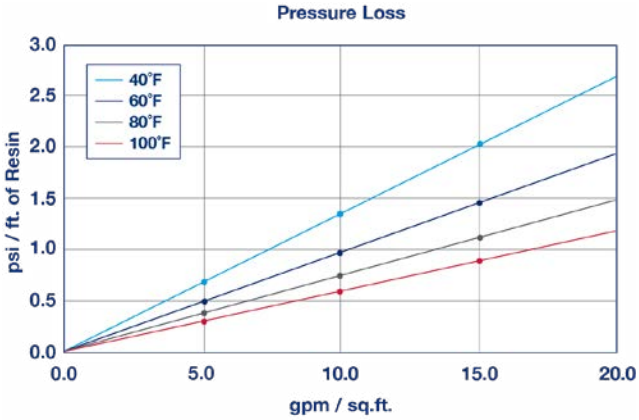

The graph above shows the expected pressure loss of ResinTech SBG1-OH-ID per foot of bed depth as a function of flow rate at various temperatures.

SUGGESTED OPERATING CONDITIONS

Maximum Temperature	140°F (60°C)
Maximum Pressure Loss	20 psi (138 kPa)
Backwash Expansion (%)	25 - 50

Flow Rate	
Working Service	Depends on fluid viscosity. Contact ResinTech

PACKAGING

Standard

42 cu.ft. Supersack | 7 cu.ft. Drum
1 cu.ft. Bag | 5 cu.ft. Drum

Metric

25L Bag | 140L Drum

RESINTECH® INC.
INNOVATIONS IN ION EXCHANGE

CORPORATE HEADQUARTERS 1801 Federal Street Camden, NJ 08105 USA PHONE 856.768.9600 EMAIL info@resintech.com WEB resintech.com

SAFETY DATA SHEETS (SDS)

Safety Data Sheets (SDS) are available for all products on the ResinTech website. They contain important health and safety information that may be needed to protect your employees and customers from any known health and safety hazards associated with our products. We recommend that you secure and study the pertinent MSDS for our products and any other products being used.

These suggestions and data are based on information we believe to be reliable. They are offered in good faith.
However we do not make any guarantee or warranty. We caution against using these products in an unsafe manner or in violation of any patents; further we assume no liability for the consequences of any such actions.

Safety Data Sheets (SDS) are available at resintech.com

RESINTECH® INC.
INNOVATIONS IN ION EXCHANGE

CORPORATE HEADQUARTERS 1801 Federal Street Camden, NJ 08105 USA PHONE 856.768.9600 EMAIL info@resintech.com WEB resintech.com